



QSD9004V & QSDR008RTC User's Manual



Contact US:

Q-see Products

**8015E.Crystal Dr
Anaheim, CA 92807**

Website:

<http://www.q-see.com>

Customer Service:

Phone: 877-998-3440 x 538

Email:cs@dpsi-usa.com

Tech Support:

Phone: 877-998-3440 x 539

Email:ts@dpsi-usa.com

Fax:

714-998-3509

Rev 100209ip

CONTENTS

Chapter 1: DVR Features	2
Chapter 2: Layout	3
2.1 Front Panel	3
2.1.1 4-Channel Front Panel	3
2.1.2 8- Channel Front Panel.....	4
2.2 Rear Panel.....	5
2.2.1 4- Channel Rear Panel.....	5
2.2.2 8- Channel Rear Panel.....	6
2.3 Remote Control	7
Chapter 3: DVR Installation.....	8
3.1 Hard Drive Installation.....	8
3.2 Camera and Monitor Connection.....	8
3.3 Power Supply connection.....	8
Chapter 4: DVR Boot up	9
4.1 System Initialization	9
4.2 Main Interface.....	9
Chapter 5: DVR Menu	9
5.1 Main Menu Preview	10
5.2 Main Menu	10
5.2.1 Camera setup	11
5.2.2 Record setup.....	11
5.2.3 Network Setup	12
5.2.3.1 DHCP.....	13
5.2.3.2 PPPoE	14
5.2.3.3 Static	14
5.2.3.4 Port Forwarding	15
5.2.3.5 Pop-ups & ActiveX Controls	15
5.2.4 Recording Search.....	16
5.2.5 Multi player	17
5.2.6 Device Management.....	19
5.2.6.1 HDD Management.....	19
5.2.6.2 Alarm Set	21
Email Alarm Notification.....	22
5.2.6.3 PTZ Setup	23
5.2.6.4 Mobile.....	23

Mobile Phone Access	23
5.2.6.5 Motion Detect	28
5.2.7 System Function	29
5.2.7.1 Time Set	29
5.2.7.2 Password	29
5.2.7.3 Video Setup	30
5.2.7.4 Language	30
5.2.7.5 Info	30
5.2.7.6 System Maintenance	30
5.3 Menu Lock	30
5.4 Video Search	31
5.5 PTZ Control	31
5.6 Record	31
5.7 Stop recording	31
Chapter 6: Net-Viewer Program	32
6.1 Plug-ins download and installation	32
6.2 Log-in to NetViewer	32
6.3 Main Interface of Net-viewer	32
6.3.1 Menu column	33
6.3.1.1 Live	33
6.3.1.2 Replay	33
6.3.1.3. Setup	33
6.3.1.4 Log out	35
6.3.2 PTZ Control	35
6.3.3 Live Play Control	36
Chapter 7: Specifications	37
Chapter 8: Appendix	32
8.1 Operation Function Table	32
8.2 Recording Alarm setting	33
8.3 Troubleshooting	33
8.4 4 Channel System Connections	34
8.5 8 Channel System Connections	34
8.6 Accessories (Included)	35
Q-See Product Warranty	36

Safety Instructions

1. Use proper power source.

Do not use this product with a power source that applies more than specified voltage (100-240V AC).

2. Never insert anything metallic into the DVR case.

Putting something into the DVR case can be a source of dangerous electric shock.

3. Do not operate in wet & dusty area or use near water.

Avoid places like a damp basement or dusty hallway.

4. Do not expose this product to rain or use near water.

If this product accidentally gets wet, unplug it and contact an authorized dealer immediately.

5. Keep product surfaces clean and dry.

To clean the outside case of the DVR, use a cloth lightly dampened with water (no solvents).

6. Provide proper ventilation.

This DVR has a built in fan that properly ventilates the system.

7. Do not attempt to remove the top cover.

If there are any unusual sounds or smells coming from the DVR, unplug it immediately and contact an authorized dealer or service center.

8. Do not attempt to remove the top cover.

Warning: You may be subjected to severe electrical shock if you remove the cover of the DVR.

9. Handle DVR box carefully.

If you accidentally drop your DVR on any hard surface, it may cause a malfunction. If the DVR doesn't work properly due to physical damage, contact an authorized dealer for repair or exchange.

10. Use standard lithium cell battery. (NOTE: Manufacturer has preinstalled battery.)

The standard lithium cell 3v battery located on the mother board should be replaced if the time clock does not hold its time after the power is turned off. Warning: unplug the DVR before replacing battery or you may be subjected to severe electrical shock. Properly dispose of old batteries.

11. Make sure there is good air circulation around the unit.

This DVR system uses a hard drive for video storage, which generates heat during operation. Do not block air holes (bottom, upper, sides and back) of the DVR that cool down the system while running. Install or place this product in an area where there is good air circulation.

Chapter 1: DVR Features

Real time monitoring	Supports real time surveillance via Monitor
Saves Recordings	DVR saves real-time recording image to HDD
Backup Recordings	Supports DVR backup via USB flash drive and hard drive.
Playback Recordings	Supports DVR single CH and multiple CH playback of recorded files
Network operation	Supports remote surveillance by multiple users simultaneously
Alarm Setting	Supports HDD & video input alarm management and external alarm signal inputs
Mouse Operation	Supports Mouse operation for faster menu navigation.
PTZ Control	Supports PTZ camera operations through RS-485.

List 1-1


Other Features :

H. 264 video compression format, supports D1, HD1, CIF resolution (QSDR008RTC CIF only)
 ADPCM audio compression format
 Windows Graphical interface
 BNC and VGA video out ports
 Supports remote live viewing via 3G mobile networks
 Supports sending email alerts when motion is detected by system
 Triplex (recording, playback and net transmitting at the same time)
 Supports USB mouse, IR remote control operation
 Rear USB2.0 ports for backup, upgrade and mouse operation.
 Supports Double Encode bit network transmission
 The video package time is adjustable
 Multiple alarm record mode
 Multiple language OSD
 Supports auto maintenance

Chapter 2: Layout

2.1 Front Panel


2.1.1 4-Channel Front Panel

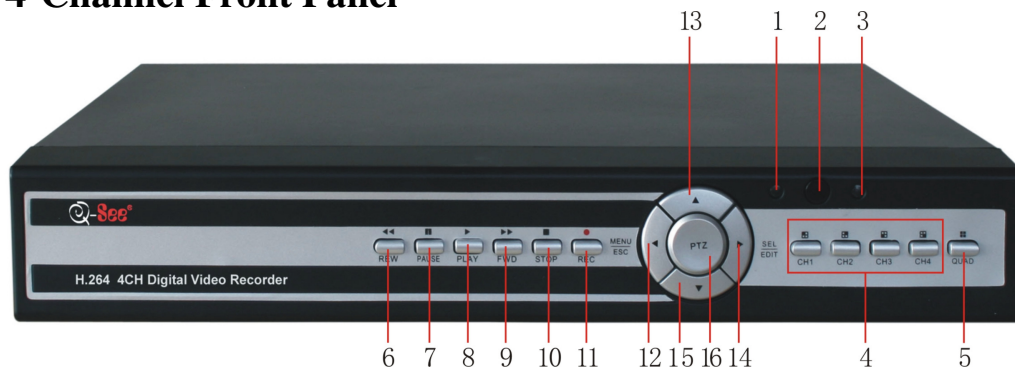

Item	Key title/Indicator	Marks	Functions
1	Power indicator	PWR	If the “Green” indicator is on the system is getting power
2	IR Receiver		Receives signal from Remote Control
3	HDD indicator	HDD	When the “Red” indicator flashes it means the hard drive is being read or written to.
4	Channel Select: CH1 CH2 CH3 CH4		Select Single Channel Display
5	QUAD		Display all cameras in Live display or playback mode
6	REW		Move Left / Reverse
7	PAUSE		Pause / play frame by frame, dwell time (Sequential Channel Switch) during single camera display
8	PLAY		Play
9	FWD		Move Right / Play Forward
10	STOP		Stop Playback; stop manual recording
11	REC		Start Manual recording
12	MENU/ESC		Enter into main menu or exit menu
13	Up		Move Up
14	SEL/EDIT		Select key / Edit
15	Down		Move Down
16	PTZ :		Enter PTZ control mode

List 2-1


2.1.2 8- Channel Front Panel

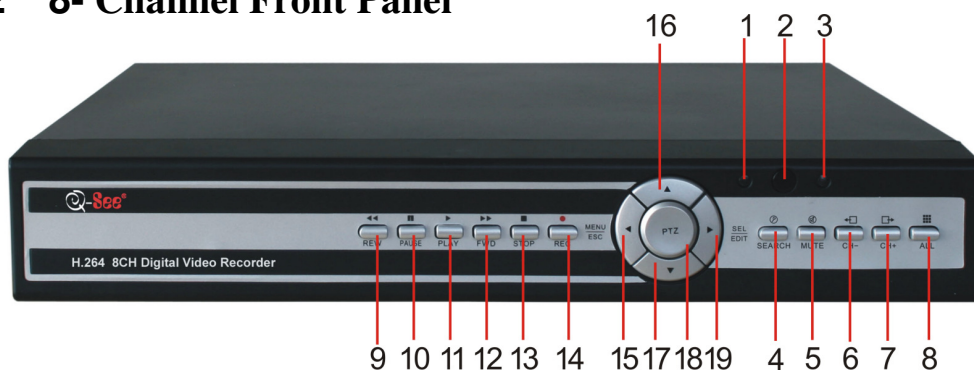

1	PWR: Power Indicator	11	PLAY: Play
2	IR receiver: Remote Control	12	FWD: Play Forward / Move Right
3	HDD: HDD Indicator	13	STOP: Stop Playback; Stop manual Recording
4	SEARCH: Search Recordings	14	REC: Manual Recording
5	MUTE: Audio Mute key	15	MENU/ESC: Menu / Escape
6	CH-: Switch to previous channel	16	UP: Move Up
7	CH+: Switch to next channel	17	DOWN: Move Down
8	ALL: Preview all channels	18	PTZ : Enter PTZ control mode
9	REW: Rewind / Move Left	19	SEL/EDIT: Select / Edit
10	PAUSE: Pause / Frame by Frame Play, dwell time (Sequential Channel Switch) during single camera display		

2.2 Rear Panel


2.2.1 4- Channel Rear Panel

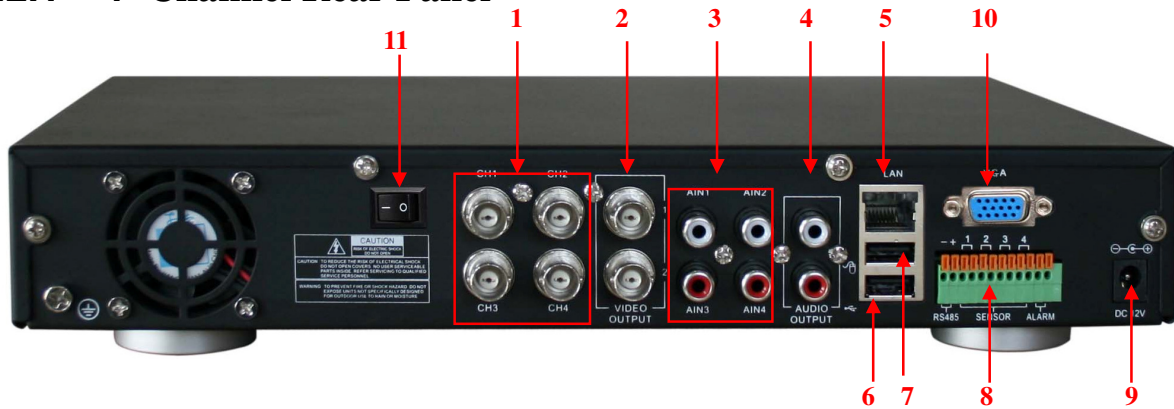

Item	Physical port	Connection method
1	Video input	Connect CH1-4 (BNC interface)
2	Video output	Connect monitor output (BNC interface)
3	Audio input	Connect CH1-4 audio signal input (RCA interface)
4	Audio output	Connect signal output (RCA interface)
5	Ethernet: Port	Connect intranet, internet (RJ45 interface)
6	USB Port	Connect USB device (Flash Drive, Hard Drive)
7	USB Port	Connect USB mouse
8	RS-485/Sensor/Alarm	RS485/Sensor/Alarm interface (see pin outs below)
9	Power Port	Connect power supply - DC12V 3A
10	VGA Port	Connect to VGA monitor
11	Power Switch	Turn Power on and off

List 2-2

2.2.2 8- Channel Rear Panel

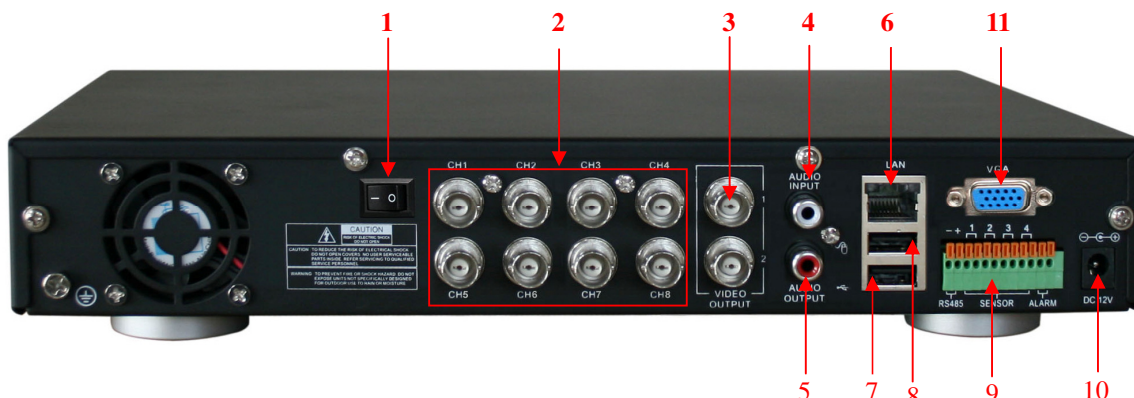

1	Power switch port	7	USB port backup to Flash Drive & Hard drive
2	CH1-8: Video inputs	8	Mouse port
3	Video Outputs	9	RS-485/Sensor / Alarm port
4	Audio Input	10	Connect Power Supply
5	Audio Output	11	VGA Port
6	LAN: LAN port for Network Access		

4-CH: RS485/Sensor/Alarm port functions

(from left to right):

Pin 1-2 : PTZ Control port

Pin 1 : RS-485A

Pin 2 : RS-485B

Pin 3-4 : Sensor 1 input

Pin 5-6 : Sensor 2 input

Pin 7-8 : Sensor 3 input

Pin 9-10 : Sensor 4 input

Pin 11-12 : Alarm Output

8-CH: RS485/Sensor/Alarm port functions

(from left to right):

Pin 1-2 : PTZ Control port

Pin 1 : RS-485A / Pin 2 : RS-485B

Pin 3-4 : Sensor 1 input

Pin 4-5 : Sensor 2 input

Pin 6-7 : Sensor 3 input

Pin 7-8 : Sensor 4 input

Pin 9-10 : Sensor 5 input


Pin 10-11 : Sensor 6 input

Pin 12-13 : Sensor 7 input

Pin 13-14 : Sensor 8 input

Pin 15-16 : Alarm Output


2.3 Remote Control

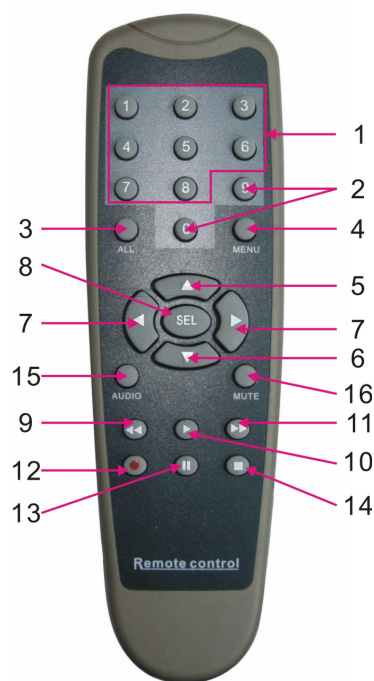

1	1-8	Channel Select 1-8 ; Numeric key
2	9、0	Numeric Key
3	ALL	Preview all Channel
4	Menu	Enter/Exit Main Menu
5	▲	Up Key
6	▼	Down Key
7	◀ / ▶	Left / Right Key
8	SEL	Select Key/ Edit Key
9	◀◀	Rewind key
10	▶	Play Key, Enter to recording search menu
11	▶▶	Forward Key
12	●	Manual Recording
13		Pause / Frame Play
14	■	Stop manual recording; Stop Playback
15	Audio	Undefined
16	Mute	Undefined

Mouse Operation

You can use a mouse instead of front panel buttons or remote control.

Click left key of Mouse	In menu lock mode, Enter into pop-up menu and clicking any sub menu to pop up Log-in window; on menu unlock mode, enter into pop-up menu, and then clicking left key to enter into any sub menu directly.	
	After entering main menu, clicking left key could enter into any sub menu; On[Detailed file] menu mode, clicking left key could playback one recording file.	
	Change the status of check box and motion detection area.	
	Clicking combo box to access pull-down menu	
	By clicking left key you can adjust Color control bar and volume control bar.	
	By clicking left key you can select values in edit boxes or pull-down menu and supports Chinese word input, special symbol, numeric and character input, use instead of [Enter-  Click right key of Mouse	In live display mode, clicking right key will display pop-up menu (shown as Picture 5-1).
	In Main menu or sub menu mode, clicking right key will exit current menu.	
Double-click Left key of Mouse	In live display or playback mode, double-clicking left key will maximize the screen.	
Moving Mouse	Select menu item	
Sliding Mouse	On motion mode, sliding mouse will select motion area; On [Color set] menu mode, sliding mouse will adjust color control bar and volume control bar.	

List 2-3

Chapter 3: DVR Installation

3.1 Hard Drive Installation

Caution : Please do not Install or take out hard drive when DVR is running!

- (1) Remove screws and open DVR upper cover carefully;
- (2) Insert Power Cord and data cable into Pin of hard drive securely;
- (3) Put the upper cover back carefully, re-attach screws.

3.2 Camera and Monitor Connection

Connect camera cable to video input of DVR, and from video output of DVR to Monitor via BNC connector (Refer to section2.2-Rear Panel); or


If the camera is a PTZ speed dome, you could connect RS485 A & B to the according port of DVR respectively (refer to system figuration on Chapter 8).

3.3 Power Supply connection

Please only use the power adapter supplied with the DVR .

Chapter 4: DVR Boot up

4.1 System Initialization

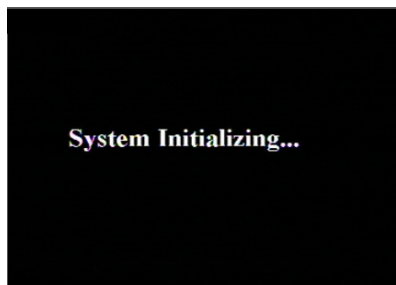

Picture 4-1

After connecting the power adapter and turning On the power button, the system will boot-up and start initializing.

4.2 Main Interface



Picture 4-2

After finishing system initialization the system will enter into main interface. Picture 4-2 is the main interface displayed by system, which is showing no video input status. Once there are video inputs, the interface will display live images from the cameras. In main interface mode, if you use the mouse to double-click the live image of any channel, the image will be maximized to full screen, by double-clicking again, the display will be come back to quad mode displaying all cameras; clicking the right button of the mouse, will enter into Pop-up Menu; by clicking the left button of the mouse, you select menu items; when clicking any area outside the menu, you will exit the Pop-up

Chapter 5: DVR Menu


Pop-up Menu



Picture 5-1

After finishing system initialization, click right key of mouse on main interface mode to enter into Pop-up Menu. Now you could proceed parameter setting and operate for Main Menu, Menu Lock, Video Search, PTZ, Start record, Stop Record and also operate for Start Cruise after successful PTZ parameter setting etc.

5.1 Main Menu Preview

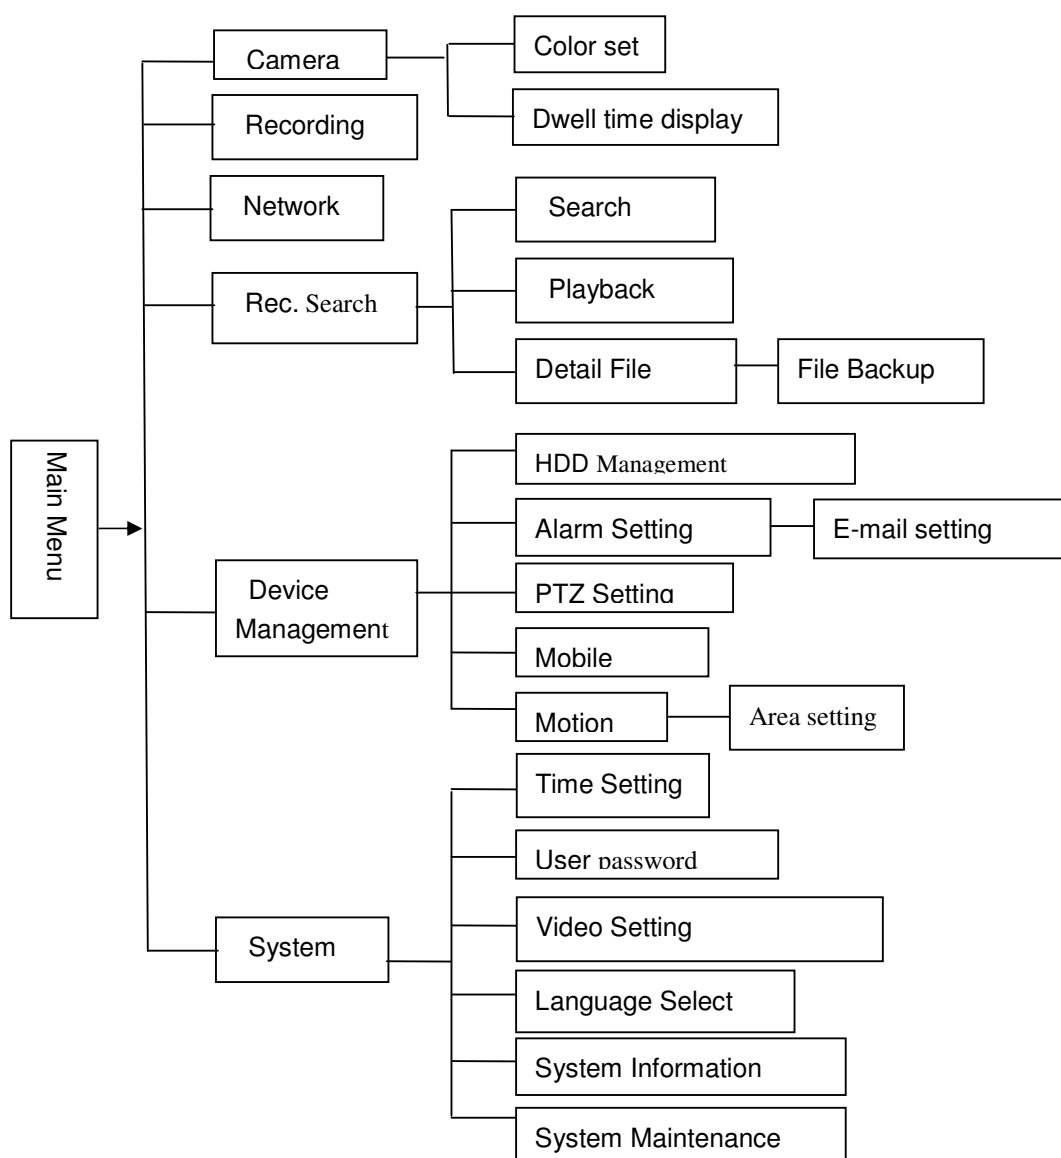

5.2 Main Menu



Picture 5-2

After clicking right button of mouse, pop-up menu will be displayed on the screen. You can click [main menu] button on pop-up menu to enter into Main menu interface (Shown as Picture 5-2). You can also use the Menu button on the front panel to bring up the window, when using the front panel buttons use the FWD and REW button to move in the menu, and the SEL button to select the icon. You use the ESC button to return to previous window. In Main Menu mode, you can control device management settings, such as Camera, Recording, Network, Recording search, HDD, Alarm, PTZ Control, Mobile Phone & motion detection etc, you can also set system function settings, such as Time setting, User password,

Audio/Video setting, Language select, and access system information, system maintenance etc.


5.2.1 Camera setup



Picture 5-3

Go to [Main Menu → Camera] to set up the name display and position display of each channel (Shown as Picture 5-3), You can also adjust image brightness, saturation, contrast and hue settings of each channel after entering into [Color] Menu and set up whether each channel can be previewed or not under Live display and/or Recording mode.

Please note that the name of each channel supports up to eight characters or four Chinese characters.

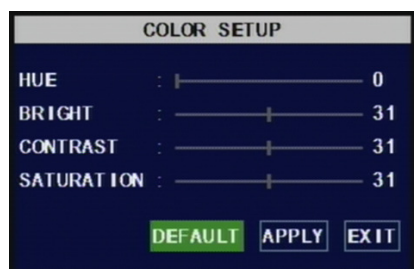


Picture 5-4

Below is the Color Menu where you can adjust image brightness, saturation, contrast and hue parameters of each channel.(shown as picture 5-4)

Explanation :

- 1、The modifications will be available after clicking [APPLY] button on the bottom of the sub-menu windows and being prompted to save and then clicking [ok] button.
- 2、 If you want to cancel the modification, click [Exit] button to exit the menu.
- 3、 When clicking [DEFAULT] button, all system default values will be reset to default value.
- 4、 System default value indicates the value pre-set at the factory.

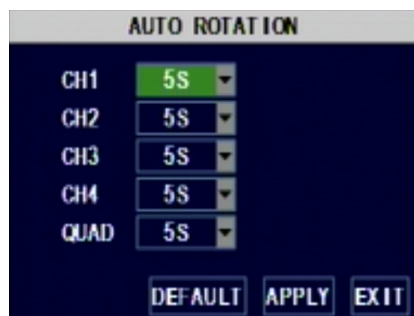

Picture 5-4A

Click [AUTOSEQ] button to start auto rotation function. (setting sub menu shown as Picture 5-4A. After starting auto rotation function, system will auto rotate the video images among CH1, CH2, CH3, CH4 and Quad in turn.

Default rotation time: 5 second

Settable time range: 0~10 second

5.2.2 Record setup



Picture 5-5

Click [Main Menu] →[Record] to enter into [Record Setup] menu (Shown as Picture 5-5)

Functions :

- 1、 The [Rec Mode] button allows you to setup recording 24 hours, on motion, or on a set schedule.


2、 [PACK time] indicates maximum continuous time length of

The [Record Setup] menu allows you set up recording status (on/off) of each channel, it also allows you setup recording image resolution and quality, and turn audio on/off. This menu also allows you select recording mode (recording after power on and scheduled recording) and recording file length.

Once a channel is set to “on” the channel can record, if it is set to “off” the video from the channel will not be recorded. **Resolution** options are D1, HD1 and CIF; and **Quality** options are Best, Good and Normal.

When Audio is set to “On”, system will also record audio from the channels and will have audio output on playback mode; if it is set to “off” you can not record audio and will have no audio output available on playback mode.

To record 24 hours a day set the Rec Mode to Always. To record on motion or a set schedule, select Time Schedule Record and click the “Schedule” option, the Schedule interface will open as shown in (picture 5-6):

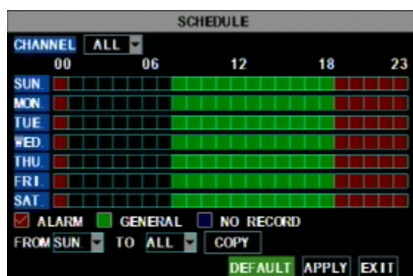

Picture 5-6

complete the schedule you activate it by clicking the [Apply] button.

You can also click on the Default button to use the system defaults. The system default settings are:

Hr01:00 am-07:59 am : No recording

Hr08:00 am-18:59 pm : Normal recording

Hr 19:00 pm- 00:59 pm : Alarm recording

Explanation: Under the recording Set menu and recording search menu, original color stands for no recording, “Red” stands for alarm recording, “Green” stands for normal recording and “Blue” stands for the channel and date you have selected.

5.2.3 Network Setup

Enter into [Main Menu→Network Set] to setup the network configuration (Shown as picture 5-7):




Picture 5-7

After selecting network mode - such as DHCP, PPPOE, or static allocation and setting up web ports (80 and 9000 by default), you can view DVR remotely over a network or the internet.

5.2.3.1 DHCP

When selecting DHCP the router will allocate DVR IP address automatically After you exit the menu. You might want to write down the addresses assigned and then switch to static and re-inter the addresses so the router does not change them later.

5.2.3.2 PPPoE

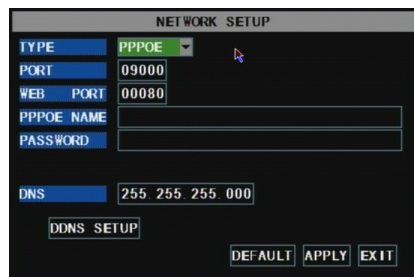


Picture 5-8

When selecting PPPoE, you need to input user and password provided by your internet service provider and set up web port (for details refer to the below picture 5-8)

5.2.3.3 Static

When selecting static allocation, You will need to setup the network settings on the DVR to match the settings of the router that you attach the DVR to. To get the router settings you would go to the Run option on a computer attached to the same router as the DVR and type cmd and hit OK to bring up a command prompt (Picture 5-9), then type ipconfig at the prompt (RED arrow on Picture 5-9) to access the router settings. Write down the gateway and subnet mask numbers (GREEN arrows on (Picture 5-9) so you can copy them into the network settings on the DVR (Picture 5-10). To get to the NETWORK SETUP window, Go to [Main Menu→Network Set] then use the Direction Keys on the DVR to go to the TYPE dropdown and select STATIC

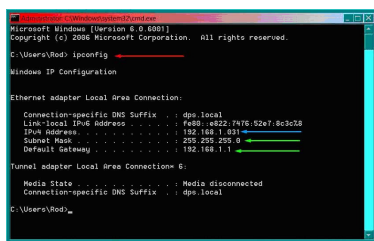

Picture 5-9



Picture 5-10

For the DVRs IP address you would enter the same first 3 sets of numbers as the gateway and select a fourth set of numbers that is different then any other device attached to the same router. If the IP address of your computer in the ipconfig (BLUE arrow in Pic 5) was a single or two digit number you should be ok with any three digit number, if the computer IP address ends with a number in the 100s then you should go with a 200 number (LIGHT BLUE box in Pic 6). After you enter the addresses hit the OK button.

At the bottom of the NETWORK SETUP window there is an option to setup the DVR to be accessed through a DDNS service. When you click on the DDNS button it brings up the window displayed as Picture 5-11. You can access the DVR through a static or dynamic IP address; however a dynamic address can




Picture 5-11

change from time to time. How often depends on your service provider. When it changes you need to go to a website such as www.myipaddress.com from a computer attached to the same router as the DVR to find out what the new IP address is. There are two solutions to this problem. One would be to get a static IP address from your service provider so that you do not have to be concerned with the address changing. Another solution would be to use a dynamic domain name service to get a domain name that can be linked to your dynamic address. You can register on our company's myq-see.com website and get a domain name, user name, and password. You can then enter


Your dynamic domain name into an Internet Explorer browser instead of an IP address and be directed to whatever the current dynamic IP address is, so that you can always access the DVR by entering the same address. This DVR also supports the DDNS service provided by dyndns.com. You can get more information on how to use these services from the myq-see.com or www.dyndns.com website.

5.2.3.4 Port Forwarding

To access the DVR from a remote computer over the internet you would then need to forward port 80 and port 9000 on the router the DVR is attached to, to the IP address of the DVR. You can get instructions on how to do this for most popular routers by going to the www.portforward.com website. On this website click on the orange "Routers" link in the second paragraph (RED box in Picture 5-12), which will open a list of router manufactures, then find the brand and model of your router on the list and click on the link. On the next page that opens click on the orange "Default Guide" link (BLUE box in Picture 5-13), this will take you to the port forwarding instructions for your router.



Picture 5-12



Picture 5-13



Picture 5-14


When you access the DVR from a remote computer you also need to use a different address in the Internet Explorer browser window. Instead of entering the IP address of the DVR you need to enter the public IP address of the router the DVR is attached to. You can get this address by going to www.myipaddress.com from a computer that is attached to the same router as the DVR. This website will display the box in Picture 5-14 below that shows the IP address you need to use. It will be in the space where the below example shows 76.254.183.54.

5.2.3.5 Pop-ups & ActiveX Controls


To access the DVR through Internet Explorer: once you have setup the network settings on the DVR to match the settings of your router and forwarded the ports needed by the DVR (for remote access over the internet), you need to modify your browser controls. You need to allow Pop-ups. To do so go to the Internet Explorer tool bar and select the "tools" option (RED box in Picture 5-15), then select the "Pop up Blocker" option and select "Turn Off Pop-up Blocker" (BLUE arrows in Picture 5-15). You will also need to enable Active X controls. To do so go to the Internet Explorer tool bar and select the "tools" option, then "Internet Options"(GREEN arrow in Picture 5-15), In the windows that opens (Picture 5-16) Go to "Security" (RED box in Picture 5-16), then click the "Custom Level" button (GREEN box in Picture 5-16), then click on OK (BLUE arrow in Picture 5-16). This will open the page shown in Picture 5-17. On this page scroll down to the ActiveX Controls and Plug Ins and make sure they are all set to either prompt (RED arrows) or enabled (BLUE arrows).



Picture 5-15

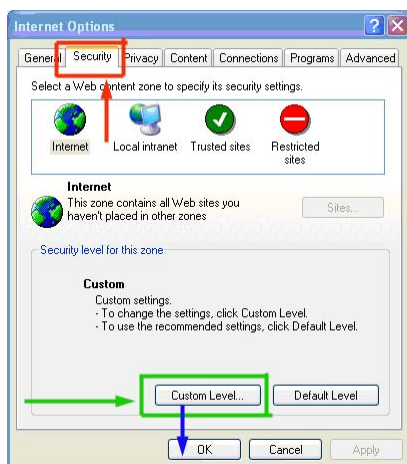

Picture 5-16

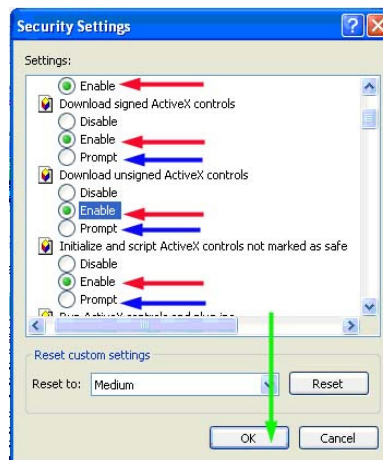


Picture 5-17

To connect to the DVR from the remote computer you would then open an Internet Explorer browser window and enter the internet IP of your router that you got by going to www.myipaddress.com.


Notice: If you cannot use HTTP port 80 or 9000 because it is being used by another program, or it is being blocked by your service provider, you can use another port in the same range. If you do so then you need to forward the IP address of the router to the other port, change the port in the DVR NETWORK settings, and you need to add the port number after the IP address. For example, if you set the HTTP port as 82, you need to enter the IP address as 192.168.0.25:82.

User name and password here are the same as what you use on the DVR.

If you get a error message that says the program cannot load because the publisher is unknown or the program is unsigned, go to internet explorer, tools, internet options (refer to Picture 5-15), then go to the "Advanced" tab (RED box in Picture 5-18), this will open the window in Picture 5-19, scroll down to "Security", and select the options to "Allow software to run or install even if the signature is invalid", and "Allow Active Content to Run Files on My Computer" (RED box in Picture 5-19).

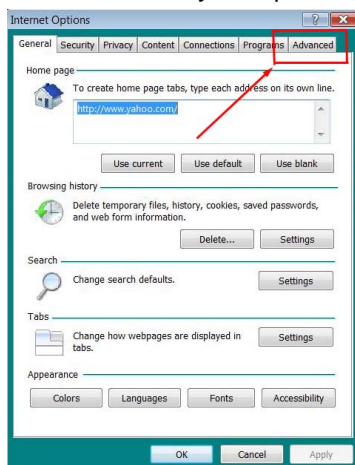


Picture 5-18

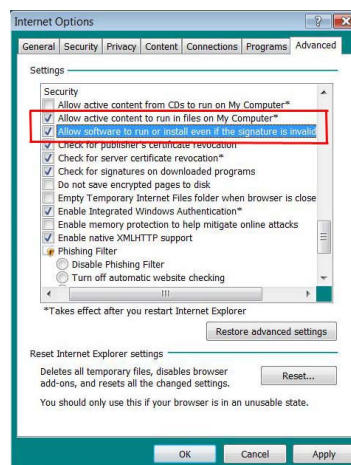

Picture 5-19

5.2.4 Recording Search

Click [Main menu→ search] to enter into [Video Search] menu (shown as the below picture 5-20).

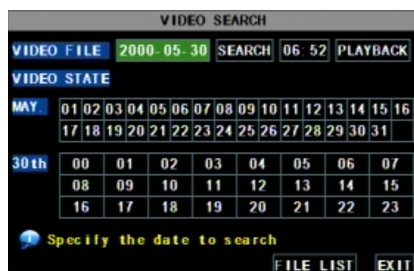

Picture 5-20


Searched playback:

If you input specific date and click [Search], you will find all the recordings for that day. When you select [Date] item, you will playback the recordings in 4 channel mode; or, click [File list] button to display File list interface, where you can playback or backup the file you selected. See File List heading below.

You can play video Forward at 2x, 4x, and 8x speeds, Slow play at 1/2x, 1/4x, and 1/8x, normal play, pause and play frame by frame using the playback control bar, and adjust volume by clicking or sliding tune control bar. When playback has finished, system will return to previous menu.

File list

On the [Video search] menu mode, click [File list] to pop up the sub-menu shown below as Picture 5-21. This option will allow you to view all of the available files by channel and type (all, normal, or alarm). You can select a file and push the SEL button to playback the file, or use the FWD button and down button to select the option and backup the recording file you selected. You can also put a checkmark in the box at the end of multiple files if you want to backup more than one file.

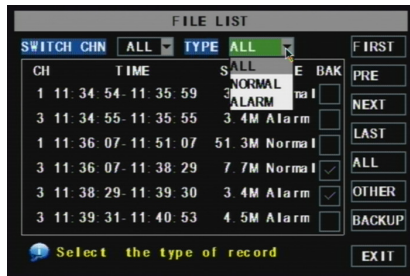

Picture 5-21

First : Indicates the first page of recording history you have searched. When you view other pages, clicking [First] button brings you back to Page one.

PRE (Previous page): When viewing event list, clicking [Previous page] button will take you back to page before the one you are currently viewing (except the first page).

NEXT (Next page): When viewing event list, clicking [Next page] button will take you to the page after the one you are currently viewing (except the last page).

LAST (Last page): Indicates the last page of recording history you have searched. When you view other pages, clicking [Last page] button will take you to the Last page.

ALL (Select All): Allows you to select all the events on the current page.

INVERSE (Select Invert): Allows you to select other events on the current page except those you have currently selected.


Recording File Backup

If you want to backup one recording from the file list, you just select the recording and click [Backup] button. When the backup is completed you will be notified. Please click [OK] button to save your backup (shown as Picture 5-22).

Explanation: Backup file will be in H264 format, you can convert it to AVI format using the Multimedia Player program that comes with the DVR or through the net-viewer program, so you can use any player which supports AVI format.



Picture 5-22

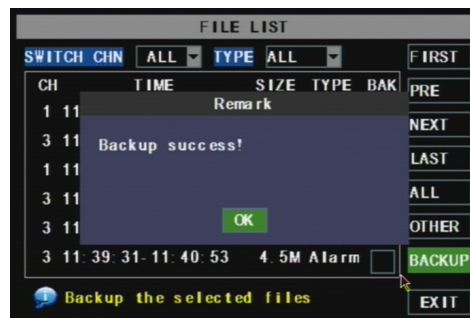


Picture 5-23

5.2.5 Multi player


- 1、 Copy backup file to your PC.
- 2、 Open multimedia player and click [File→ Local (F)] to find/select the backup file, and then click [open]

button

Note: the file type you have selected should be *.264 format.

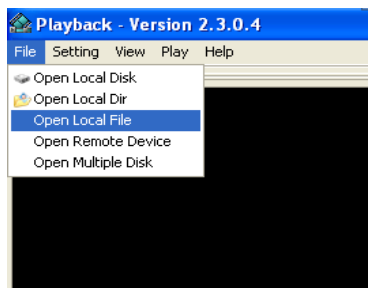


Picture 5-24

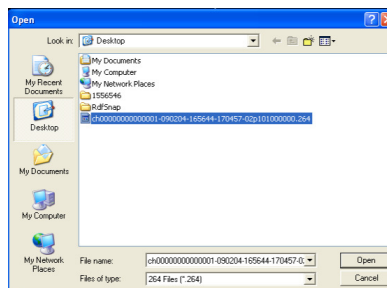



Picture 5-25

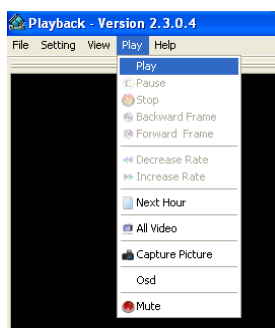3. Open backup file:




Picture 5-26

(1). Click [Play] menu (P) on the top of multimedia player interface to select playing the backup file;

(2). Click pop-up menu button  on the bottom of multimedia player and [Play- ] button, then the backup file will be played on the according channel.

(3). The Menu brief on the bottom of multimedia player:

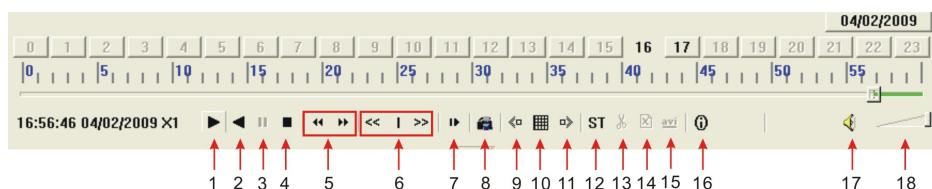

Date: **04/02/2009** recording date for the current backup file shown as right corner;
24H recording time: lie under [Date] menu. Black number button stands for current recording playback is normal recording for the time line.



0~60 Minute recording time quantum: Green part on play processing bar stand for recording length for one hour recording.




Recording date and time processing for the current recording file

1	Play	10	All the windows
2	Previous recording file	11	Add window
3	Pause	12	Start
4	Stop	13	Cut
5	Previous frame / Next frame	14	Delete


6	Slow play, Normal play, Fast Play	15	Convert AVI
7	Next Hour	16	OSD
8	Capture picture	17	Mute switch
9	Reduce window	18	Volume adjust

4、Please refer to the below [Video on] setting procedure (System default - video for every channel is on)

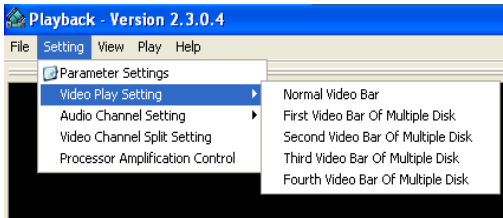

Picture 5-27


Setting→Video play setting →Normal video Bar→Select the channel you want to display→ Select ☒ to play the video→Apply→OK

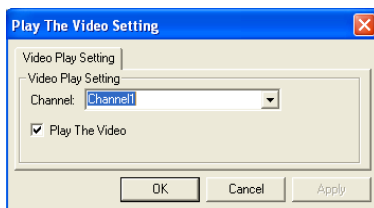


Picture 5-27A

5、Refer to the below for [Audio on] setting procedure. (Setting parameter will be available after re-starting multimedia player after [Audio on] set up.)

Setting→Audio channel setting → Normal video Bar→Select the channel you want to playback the audio→Select ☒ the channel has audio files→Apply→OK.

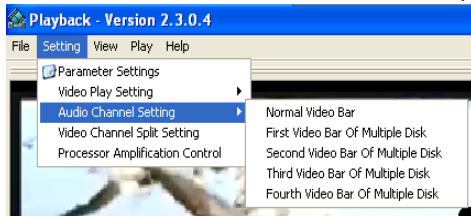

Picture 5-28A

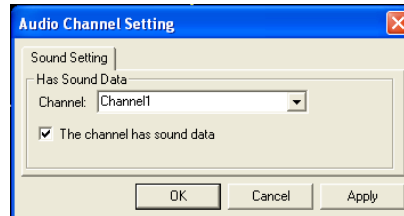

Picture 5-28B

After successfully setting the above, when you playback the current channel, you can open the channel's audio function at the same time as the video

5.2.6 Device Management



Picture 5-29

Options in device management include Hard drive, External Alarm, PTZ control, Mobile Phone Monitoring, and Motion Detection.

5.2.6.1 HDD Management



Click [Main Menu→Device → HDD] to enter [HDD Management] menu (shown as Picture 5-30)



Picture 5-31

When you install a HDD, the system will automatically detect if HDD is formatted or not; If HDD needs to be formatted, HDD status will be shown as “Not format”, otherwise, the HDD status will be shown as “Normal” (refer to Picture 5-31)

TOTAL SPACE: Indicates total space available on Hard Drive.

FREE SPACE: Indicates unused space available on the Hard Drive.


USEABLE REC TIME: Based on current image detail/quality and frame rate, system will show you how Recording time you have left on the Hard Drive.

OVERWRITE: If you select “on” the system will automatically overwrite the oldest recordings once the hard drive is full; if you select “off”, recording will stop once the hard drive is full.

HDD FORMAT: You use this option to format the hard drive, you can not record files to the hard drive until it has been formatted. Click [Format HDD] button to start formatting. When selecting [Format HDD] option the system will prompt you – “Format HDD will loss all the data, do you confirm?” ; click “OK”, system will prompt you – “Is formatting...” and “successful format”; and then system will restart automatically.

USB FORMAT: Use this option to format USB devices.

5.2.6.2 Alarm Set

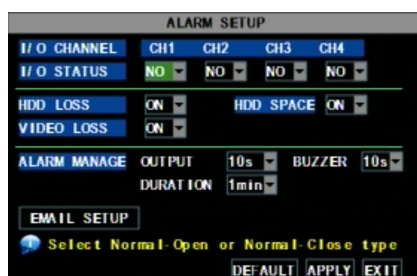

Picture 5-32

Click [Main Menu→Device → Alarm] to enter into [Alarm setup] menu to setup Alarm warnings (shown as Picture 5-32).

I/O STATUS : Options include NO (Normal-open), NC (Normal-close) and OFF. Set to “Normal-open” if you use external sensor alarms that are normally open, Set to “Normal-close” if you use external sensor alarms that are normally closed, set to “off” if you are not going to use external sensor alarms. You can use the DVRs

not external sensors to record on motion detection.

HDD LOSS: Options are On and Off. If you select On there will be a buzzer sound and “H” sign on screen when HDD is not detected or not formatted; on the contrary, if you close the function, there is only “H” sign to indicate HDD not found, but no alarm sound when HDD not found or not formatted.

HDD SPACE: Options are On and Off. When the alarm function is on, there are alarm sounds when the HDD is running out of space; when the function is off, there are no alarm sounds.


VIDEO LOSS: Options are On and Off. When the function is on, system will issue alarm sound and display video loss on the preview interface; when the function is off, system will have no alarm sound, but the preview interface will display video loss.

ALARM MANAGE : Alarm Output (0s,10s,20s,40s,60s), Buzzer time (0s,10s,20,40s,60s) and alarm duration time (0s, 30s, 1minute , 2minute , 5minute)

Alarm Type	Function
Video Loss	Sends alarm when DVR can't receive video signal (such as camera damage, cable broken or
Motion Detection	When an object moves into motion detection area, alarm will be triggered. You can adjust sensitivity
I/O Status	System can convert alarm signal triggered by external sensor into signal identified by system.
HDD loss	When Hard Drive is not detected (HDD damage, power supply malfunction), or HDD auto-overwrite is


Email Alarm Notification

(to send notice to email account when motion alarm is triggered)

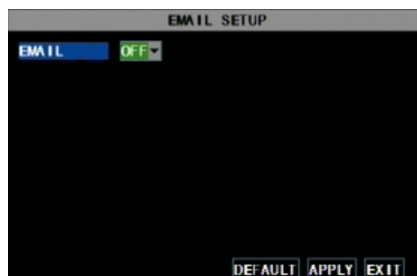

Picture 5-33

Click the [Email setup] menu to enter into its sub menu (shown as Picture 5-33).

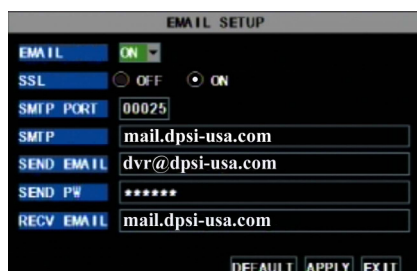


Picture 5-34

On the [Email setup] mode, refer to its parameter setup shown as picture 5-34 when setting email alarm to “on”.

SSL: is a security link transport protocol. You can encrypt your communication info (including your email) using SSL to prevent hackers from monitoring your email or communication info and even your password.

Please set SSL to “On” via Gmail.com server, and set to “Off” via other mail server.

If your setting is still not right, please contact the web site where you have applied for your email box to get SMTP server and SSL of mail box.

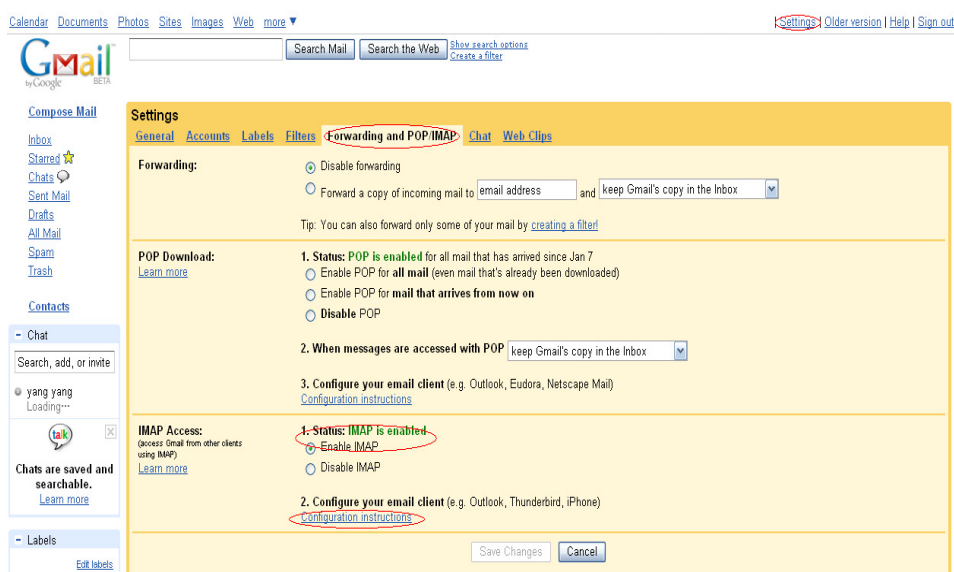

Picture 5-35


SMTP Port: indicates sender port of SMTP server. Generally the SMTP port value is 25, but there are exceptions, for example, SMTP port of G-mail server should be 465.

SMTP server: indicates server address you use.

Sender email: indicates sender's email address. The email address should be consistent with the server you use. That is to say, when you use email address – aaa@gmail.com, the according server should be smtp.gmail.com.

Receiver address: indicates receiver's email address. The email address is used to receive ima

ge transmitted from motion detection alarm of DVR. Please clear the images you have received as soon as possible to avoid overloading your email account. For detailed SMTP protocols settings refer to the below picture 5-35A.

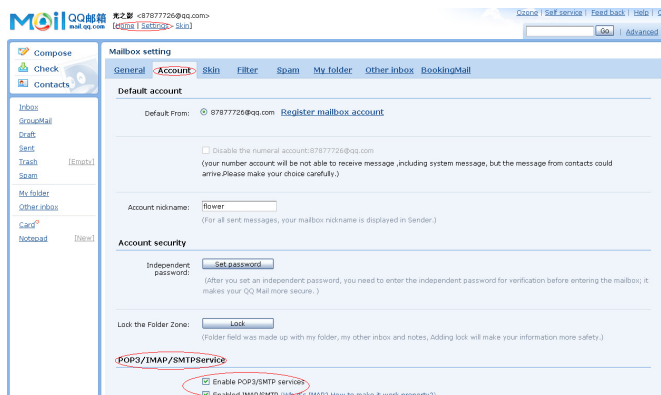

Picture 5-35A


5.2.6.3 PTZ Setup



Picture 5-36

Enter into [Main menu→Device→ PTZ Setup] to select the channel you want to control and set PTZ protocol (Pelco-D or Pelco-P), Baud Rate (1200, 2400, 4800, 9600), Stop bit (1, 2), Parity Check (None, Odd, Even Mark Space), Address Code and Cruise status respectively. Please note the above mentioned channel settings must match the settings of the PTZ camera.

5.2.6.4 Mobile

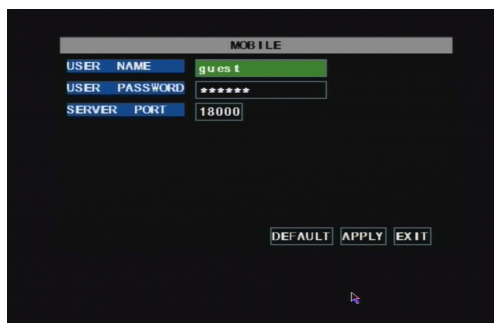

Picture 5-37

Click [Main menu→Device→Mobile] to enter into [Mobile] menu.

User Name: indicate user name of DVR.

User password: indicate user password of DVR

Server port: Mobile monitoring port. Setting range is between 1024 and 65535. Please note that

Explanation: Please connect DVR to Internet before setting DVR port number and the server port no is not equal to network menus.

Mobile Phone Access

The DVR is currently compatible with mobile phones running Windows Mobile and Symbian operating systems on 3G networks.

Before you can access the DVR from a mobile phone you need to setup the Network Configuration on the DVR. Go to section 5.2.3 Network Setup on page 14 of the product manual for instructions on how to do this. You also need to go to the Main Menu then Devices then Mobile and enter your user name and password, and set the Server Port to 18600. This port also needs to be forwarded to the IP address of the DVR along with the ports from 5.2.3 Network Setup.


Explanation: You can only see one channel at a time when viewing from a mobile phone. The

speed of the display depends on the speed of the internet connection.


When accessing from a mobile phone with Windows Mobile operating system, use the following procedure:

1. Webcam installation


First you need to install the webcam program that is included on the CD that comes with the DVR by copying the "QQeye.CAB" file to the mobile phone. You can do this by attaching the mobile phone to a computer and copying the file from the CD to the memory card on the phone, or by copying the file from the computer to the phone's memory card through a memory card reader or through a Bluetooth connection.



Pic 1




Pic 2




Pic 3

2. Click the windows mobile folder (red box in Pic 1) and choose the file "QQeye". Select the file which will open the window in Pic 3. The file is generally faulted to save as Device, direct to phone, (shown in Pic 3) but you can save it to Device or Storage Card.


3. Choose storage location and click [Install] button (red box in Pic 3) to start the installation (please refer to display in Pic 4 below)



Pic 4




Pic 5




Pic 6

4. After installation finishes, click the icon named QQeye (red box in Pic 5) to run the program. This will display the program screen in Pic 6.

5. Settings: Click [Setting] button (red box in Pic 6) to enter the Setting menu shown as Pic 7



Pic 7



Pic 8



Pic 9

User name: same as user name setup in DVR under Menu, Devices, Mobile

Password: same as password setup in DVR under Menu, Devices, Mobile

Server address: Public IP address of router DVR is connected to.

Web port: Same as the Server Port you setup in the DVR, it needs to be forwarded to the IP address of the DVR, setting range is between 1024 and 65535, the default setting is 18600. Note: this port is in addition to the ports used for standard remote access.

Channel: Select the channel from the DVR you want to monitor and click [OK] button (red box in Pic 7) to display the screen in Pic 8 and start video connection.

6. Main interface operation (Pic 8)

Click [Disconnect] button to stop displaying live image of the channel.

Click [Setting] button to modify the settings.

7. Video connection Display

Normal Mode:

You will find network connection status info under the video image:

Display on the left corner: Network transmission speed, Frame rate and Resolution.

Display on right corner: percentage of buffer display, Connection success, Connection fail, Play and Stop.

Function of Buttons under the video image from left to right: PTZ control (Left, Right, Up and Down), area select (Zoom out and Zoom in), Focus (Add “+” and deduct “-”) and Iris (Add “+” and deduct “-”) and Snap to capture screen image.


8. Display mode: You can convert normal display into full-screen display by clicking the screen on the mobile phone (displayed as Pic 9)

When accessing from a mobile phone with Symbian operating system, use the following procedure:


1. First you need to copy the file with suffix “QQeye.CAB” that is included on the CD disk to the mobile phone.

Copying file is save to storage card by default, and the file can also be transmitted from the CD through a computer by Bluetooth technology to save to Inbox (Pic 1). Select the QQEye program (red box in Pic 1) which will display Pic 2.


2. Select the QQEye icon in this window (red box in Pic 2) to install it, this will display Pic 3).



Pic 1




Pic 2




Pic 3


After the phone finishes preparation it will display Pic 4 asking for permission to install the program. Select the Yes button (red box in Pic 4). This will display the window in Pic 5.



Pic 4




Pic 5




Pic 6

3. Click the Continue button (red box in Pic 5) on the information box displaying the program and current version. This will display the window in Pic 6.


4. Next choose where you want to install the program, to phone memory or to the memory card, and click on the Select option (red box in Pic 6). This will display the window in Pic 7, click on Continue (red box in Pic 7) which will display the screen in Pic 8 and tell you it is installing the program (red box in Pic 8).



Pic 7




Pic 8




Pic 9


5. Once the installation is complete the window in Pic 9 will be displayed to tell you that installation is completed. Then you can go to the Applications folder and select the QQEye program (white box in Pic 10) and click on the Open option (red box in Pic 10) to display the settings menu. After you complete the settings and click on the Done button (red box in Pic 11) the Video window in Pic 12 will be displayed.



Pic 10



Pic 11



Pic 12

Default Access Point :

Input the access point. System default for the access point is GPRS connection.

Server Address :

Input the public IP address of the router the DVR is attached to (refer to section 5.2.3 Network Setup on page 14 of the product manual).

Server Port :

Web port: Same as the web port setting on the DVR, you need to forward this port from the Router to the DVR. Setting range is between 1024 and 65535, the default setting is 18600. Note: this port is in addition to the ports used for standard remote access.

User Name:

Same as user name setup in DVR under Menu, Devices, Mobile

Password :

Same as password setup on DVR. (Please press Function key to save the password, left soft key won't be able to save the password)

Channel:

Select the channel you want to monitor and click [OK] button to start video connection

Network connection status: percentage of buffer display, connection success, connection fail, play and stop.

Channel select, PTZ control, Zoom in/out, Focus and Iris

Play/Stop, Full screen/ Normal Display, Capture, Parameter setting and Exit 【】

By clicking on the image you can see it full screen as in Pic 13



Pic 13

When accessing from an iphone, use the following procedure:

On the DVR:

The DVR must have the latest Firmware version 090706 or newer

Go to Menu – Devices – Mobile

Set User name and password. Example admin / admin

Set the port: 18004

From the PC, forward port 18004 in the router going to the IP of DVR.

On the iPhone:

Open APP STORE


Search for APLAYER, click FREE and click Install (you need to have itunes account)

You will see an icon for Aplayer.



Click on the Aplayer icon.


Click Setting button (red box) at the bottom right corner of screen.




Enter the Server IP (your public IP) / Keep port as 18004 / enter same user ID you put in the DVR (in menu-devices-mobile) and enter password. Then click Back (red box) on the top.



Click Play button on the bottom left corner (red box in first picture below) to connect to DVR. After connecting, CH1 will display as shown in the second picture below. You can change to CH2 by push # 2 (red box in second picture below).

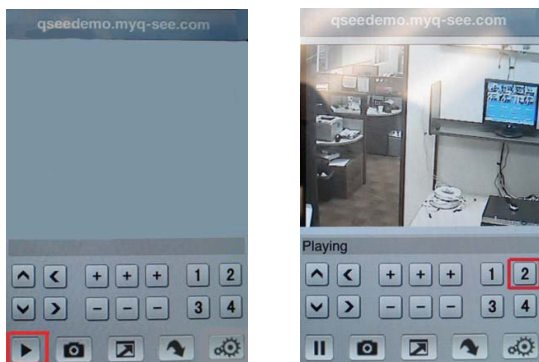


If you have an 8 camera system you would click on the down arrow in the bottom row (red box in first picture below) to view the buttons to access the next 4 cameras (as shown in the red box in the second picture below). If you have a 16 camera system continue to click on the down arrow to access the rest of the cameras.

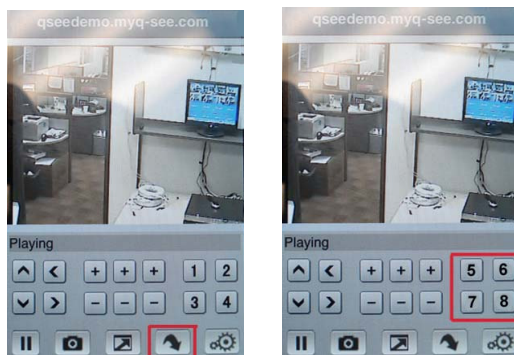

If you like this application, please leave good feedback in appstore.

5.2.6.5 Motion Detect

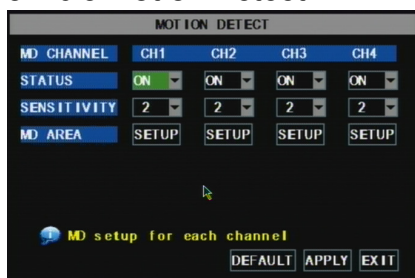


Picture 5-38

Click [Main→Device→Motion] to enter into the [Motion Detection] menu to setup motion detection recording.

The [Motion detection] Menu has three sections, including Channel Status, Sensitivity and Motion area.

Channel STATUS: This option allow you enable motion detection on any channel.


SENSITIVITY: This option allows you to set sensitivity level of motion detection from 1 to 4 with 4 being the most sensitive.

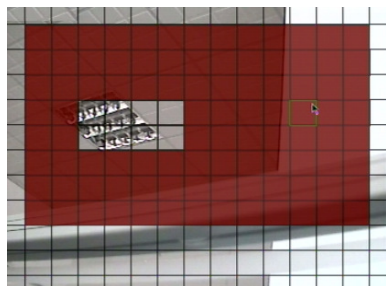

Picture 5-39

MD AREA: This option allows you select the area you want to be sensitive to motion. The channel is separated into a 13*10 area. When any object moves into the motion detection area, and the area where the object is located is displayed in red recording will be triggered. In the semi-transparent area the motion detection is off.

5.2.7 System Function

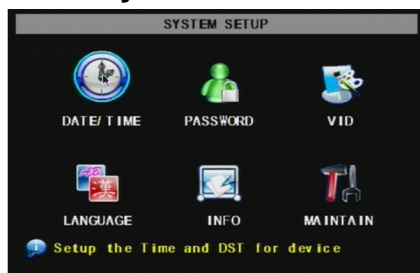

Picture 5-40

The [System] Menu includes the below sub-menus: Time Set, User Password, Audio/Video Setting, Language select, System Info and System Maintenance.

After entering into the [System], you can configure the system to meet your needs.


5.2.7.1 Time Set



Picture 5-41


Click the [Main menu→System→Date/Time] in turn to Enter into the time setup menu shown as Picture 5-41 to not only modify system date, time, date/time format and time zone, but also setup DST (day saving time) status and mode.

5.2.7.2 Password

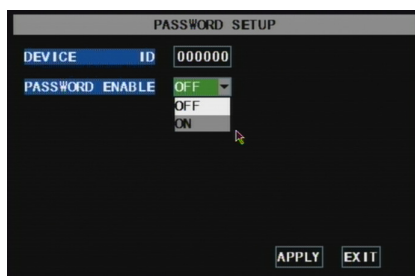

Picture 5-42


This option allows you set the device ID for the DVR and set the system password if you want to use one. The new passwords will be available after clicking [APPLY] button.

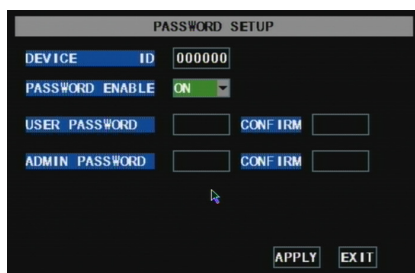

Picture 5-43

When you set Password Enabled to “ON” (shown as Picture 5-43), you can setup a user password and administrator password respectively. The password supports up to 6 characters.

5.2.7.3 Video Setup

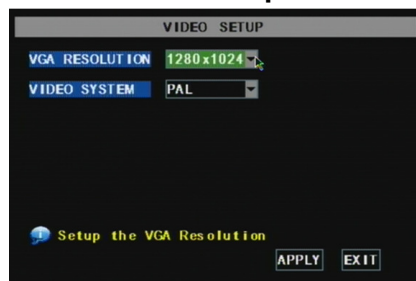


Picture 5-44

Click [Main Menu→System→VIDEO] to setup Video, here you can set Camera system (PAL, NTSC) In the USA we use NTSC.

You can also set the resolution for the VGA video out port. Your options are 600x480, 800x600, or 1024x768, or 1280x1024.


5.2.7.4 Language

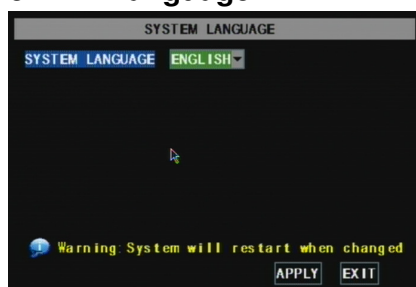

Picture 5-45

Enter into [System Language] menu to select the language you want to use on the DVR (shown as Picture 5-45) and click [APPLY] button. The selection will be available after system Auto restarts.


5.2.7.5 Info.

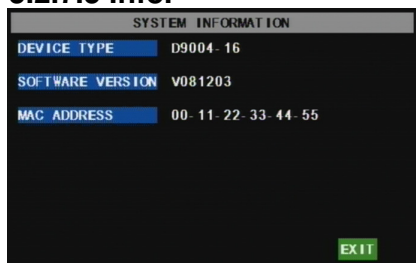

Picture 5-46

Click [Main Menu→ System→Info] to enter into [System Information] menu to view system info, including Device type, Software (firmware) version and MAC address etc.


5.2.7.6 System Maintenance

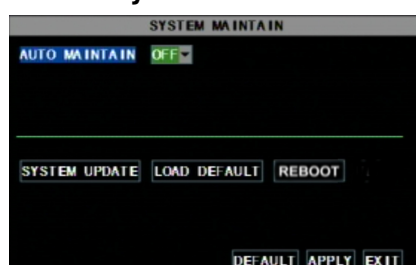

Picture 5-47

This option allows you reset the DVR to factory default settings, update system software (firmware), and set system auto-maintenance. Click [Main menu→System→Maintain] to enter into the [System Maintain] menu (shown as Picture 5-47). When opening auto-maintain function, you can setup system to restart regularly.

5.3 Menu Lock

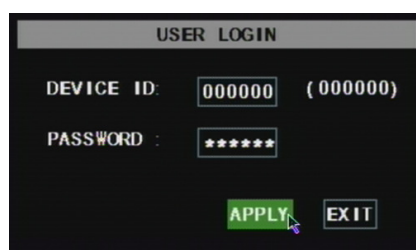

Picture 5-48


As a system safety feature you can click [Menu Lock] menu to lock menu when leaving the DVR. If you want to login to the DVR, you would input device code and password (refer to the Menu Locking interface- Picture 5-48).

Explanation: User only has the authority to search recordings, but Administrator has full authority over Main Menu operations

5.4 Video Search

Click pop-up menu video search to enter into [Video Search] menu you search files and playback recordings. For more information on this operation refer to the previous section 5.24.

5.5 PTZ Control




Picture 5-49

We introduced setting PTZ parameters previously in chapter 5.2.5.3. Here we will discuss how to operate PTZ controls.

Click pop-up menu to show PTZ option and enter into PTZ control interface (shown as Picture 5-49). You can now click Z+&Z- keys to zoom In or out, click F+&F- keys to control camera focus and click I+&I- to adjust iris.

Cruise Set

Open auto cruise function on PTZ setting menu if you want to setup cruise function (system default: on), and set up cruise channel, cur point and total quantity and stop time etc.



Channel select: select the channel with the PTZ camera

Total: set up presetting bit quantity

Cur Point: System has default starting (current) cruise point as 01. You can use this option to set additional cruise points.

Stop time: sets the pause time at each stop.

GOTO : select this option to go to specific preset points

Set: save the preset point. After setting channel and setting the position by adjusting PTZ direction key you click [Set] button to setup the pre-set point. Please note you will click the [Save] button to finish the setting successfully. If you want to combine Zoom, Iris, Focus and direction keys into the pre-set setting, please return to previous menu (shown as Picture 5-56) to add additional settings, and then enter into Cruise Set again and click [Set] and [Save] to make sure your setting is setup successfully.

Clean: remove settings.

Note: this DVR model supports up to 100 pre-set points. But actual quantities may be restricted by the PTZ camera you are using.

5.6 Record

When you want the system to start recording click [Rec] button to start manual recording.

5.7 Stop recording

If you want to stop manual recording click [Stop Record.] menu or [Stop] button

Chapter 6: Net-Viewer Program

6.1 Plug-ins download and installation

Open IE browser and input IP address and web port of DVR, such as <http://172.18.6.202:80/> and confirm to download and install webcam. If your computer is connected to internet, computer will auto download and install the webcam.

Reminder: If the webcam is not downloaded successfully, please check if your browser's safety level or firewall setting is too advanced. Also refer to section 5.2.3 Network Setup to make sure network configuration is correct, ports are forwarded correctly, and ActiveX is enabled.

6.2 Log-in to NetViewer



Picture 6-1

After webcam installs plug-ins, please select log-in language (Chinese or English) and enter password and click [Log-in] button, and now you can view DVR remotely through NetViewer.

Please note default password is empty. System allows Administrator to set new password as per instructions in section 5.2.6.2 - [Password set] menu.

Note: If you want to delete old IE webcam at DVR system update, run the command characters: "regsvr32/u dvrocx.ocx"

After successful Log-in to Net-viewer, system will enter into live display interface and connect to audio/video feed automatically (shown as Picture 6-2).



Picture 6-2

6.3 Main Interface of Net-viewer



Picture 6.3

Log in Net-viewer and show the interface as follows

6.3.1 Menu column (Section 1 on Picture 6-3)

6.3.2 PTZ Control (Numbers 2, 3, 4 on Picture 6-3)

6.3.3 Live Play Control (Numbers 6 through 10 on Picture 6-3)


6.3.1 Menu column (Section 1 on Picture 6-3)

Menu column include [Live] menu, [Replay] menu and [Setup] menu and [Logout] menu.

6.3.1.1 Live

After Logging-in to system, system will enter into Live display (shown as Picture 6-3).

6.3.1.2 Replay

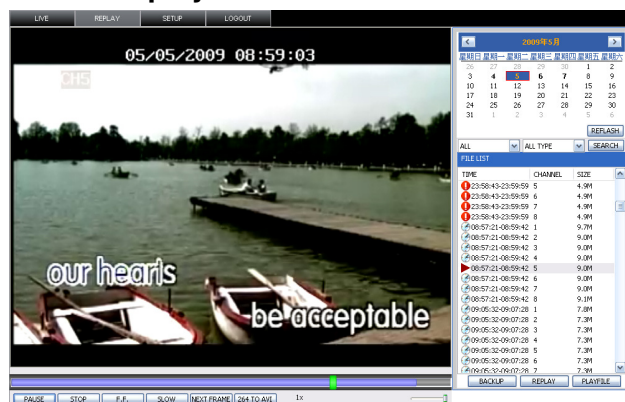

Picture 6-4

Play button: [Play]/[Pause]

Stop button: stop playing recording.

F.F. button: fast forward playback recording

Slow button: slow playback recording.

Next Frame: play frame by frame.

264 TO AVI button: convert file from H.264 format to AVI format



The native format of the backup files is H.264, you can convert H.264 format into more familiar AVI format by clicking the key of 264 to AVI.

6.3.1.3. Setup

Click [Setup] menu to enter into its sub menu, including [Recording Mode] menu, [Alarm Mode] menu, [PTZ Control] Menu, [Network Setting] menu, [System Setting] menu and [Host Info] menu.

Explanation: Only when DVR is on the status of live display, you could modify and save its parameters remotely at this moment, the settings are available. The modification method to DVR via Net-viewer is the same as local adjustment of DVR.

① Record




Picture 6-5

This option allows you to playback recordings remotely.

First select the day, channel and type and proceed searching and refreshing; second select any event from search result list to playback.

Please note you can control playing speed by sliding the playing-control bar on the bottom of the interface (shown as Picture 6-4).

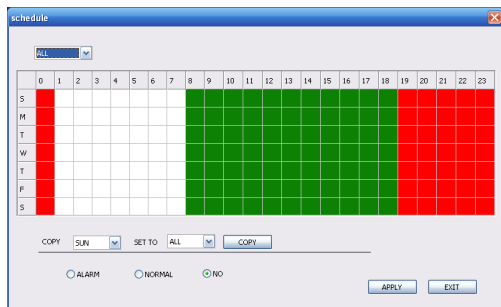

Picture 6-6

Click the [Schedule] menu to enter into its sub menu (shown as Picture 6-6).

Remote setup methods are the same as local DVR setup. Please refer to Section 5.2.2 Record Setup

② Alarm




Picture 6-7

Click [Alarm] menu to enter into its sub menu (shown as Picture 6-7).

You can set I/O alarm for every channel, motion detection alarm, motion recording, motion trace, motion sensitivity, video loss alarm, HDD not enough space alarm, HDD not found alarm and alarm output time etc.

For details on setup method please refer to section 5.2.5.2.

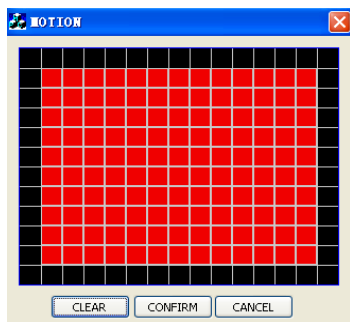

Picture 6-8

System allows you setup motion detection settings for each channel of DVR remotely (shown as Picture 6-8)

③ PTZ Control



Picture 6-9

Click [PTZ control] to setup PTZ cameras. Remote setup methods are the same as local DVR setup.

Please refer to Section 5.2.5.3 (shown as Picture 6-9).

④ Network



Picture 6-10

Click [Network] to enter into [Network] menu. Remote setup methods are the same as local DVR setup.

Please refer to Section 5.2.3. – Network Set.

⑤ Setting




Picture 6-11

Click [setting] menu to enter into the menu interface (shown as Picture 6-11);

Click [...] button to preview net-viewer recording saving path and screen capture saving path.

The menu also allows you to set a lower bandwidth for Internet video transmission, set user password, turn daylight saving time on/off, etc.

⑥ Host Info

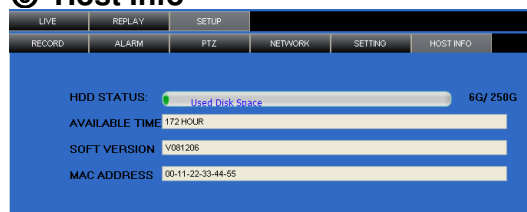

Picture 6-12

Click [Host Info.] to enter into the sub menu (shown as Picture 6-12). Here you can check Usage rate of HDD, available recording time, software version and MAC address.

6.3.1.4 Log out

Log out of the system.

6.3.2 PTZ Control (Numbers 2, 3, 4 on Picture 6-3)

Note: below-mentioned series no will be consistent with the remark no shown as Picture 6-2.

2.PTZ direction control: Control PTZ moving direction

3.Zoom, Focus and Iris Control: control direction, zoom, focus and iris of PTZ.

4.Presetting bit Control

CUR : display current presetting bit or input a presetting bit you want to fix at according edit box.

Load : Load one presetting bit setting you have saved last time.

Save: Save presetting bit.


Set: set presetting bit parameter (Details setting method please refer to section 5.5- cruise set.


GOTO: on the preview mode, please input one presetting bit no and click [GOTO] button, you could fix the presetting bit quickly.

Clean: clean presetting bit setting





Cruise: control cruise status (including on and off).


6.3.3 Live Play Control (Numbers 6 through 10 on Picture 6-3)

⑤ On / Off Live display [] : When Live display status is “On”, Clicking the button closes Live display. When “Off” clicking the button opens the Live display.

□.Capture [] : Capture Screen image and save to PC as *.bmp image.

□.Recording [] : Operate DVR recording remotely

□ Channel display [   ] : The icons stand for Single Channel display, Quad Channel display, 3x3 Channel display and 4x4 Channel display respectively.

□.Volume control [] Click or slide the control bar to adjust sound volume.

Chapter 7: Specifications

Model	QSD9008V	QSDR008RTC
Video System	NTSC / PAL(Optional)	
Compression Format	Video : H.264 / Audio : 8kHz*16bit ADPCM	
Video Output	4-CH BNC Input/ 2-CH BNC Output / 1-VGA output	8-CH BNC input/2-CH BNC output / 1-VGA output
Audio I/O	4-CH RCA audio Input / 1-CH RCA audio Output	1-CH RCA audio input/ 1-CH RCA audio output
Display Resolution	D1 : 704×576(PAL) 704×480 (NTSC)	
Frame rate	Single CH PAL : 25 fps , NTSC : 30 fps	
Recording Resolution	PAL: CIF(352*288), HD1(704*288) D1 (704*576) NTSC:CIF(352*240),HD1(704*240) D1 (704*480)	PAL : CIF(352×288) NTSC : CIF(352×240)
Recording Frame Rate (shared)	PAL : 25 fps@D1, 50 fps@HD1, 100 fps@CIF NTSC : 30 fps@D1, 60 fps@HD1,120 fps@CIF)	PAL : 200 fps@CIF NTSC : 240 fps@CIF
HDD	1 SATA HDD, up to 1024GB ; USB removable HDD	
Video Mode	Always / schedule / manual /motion detection / sensor triggered	
Record Pack Time	15/30/45/60min	
Video backup	USB flash disk / removable HDD , USB Burner, Network backup to AVI File Format	
Playback Mode	PLAY /SLOW /FWD/Frame by Frame	
Alarm I/O	4-CH alarm inputs, 1-CH alarm output	8-CH alarm inputs,1-CH alarm output
Alarm Type	Motion/ sensor triggered/Video loss/HDD Space/HDD Loss	
PTZ Control	Built-in RS-485 port, supports PELCO-P & PELCO-D	
USB 2.0 Port	Supports USB mouse , removable HDD , USB flash drive to backup to AVI file and upgrade system	
Ethernet	One RJ-45 10M/100M self-adaptable Ethernet interface	
Network Protocol	Supports TCP/IP, DHCP, UDP, DDNS, PPPOE network Protocol	
Network Function	Support preview live display remotely via mobile phone and real time monitoring via IE-based browser and/or network, and support parameter setting of DVR remotely.	
Power consumption	10 ~ 15W (exclude HDD)	
Power Adapter	DC 12V / 3A	DC 12V / 5A
Working Temperature	50°F to 104°F (10°C to 40°C)	
Working humidity	10%~90%	
Dimension (W x D x H)	11.75 x 9 x 2 in (300 × 220 × 47 mm)	




Chapter 8: Appendix

8.1 Operation Function Table






Type	Title	Description	
Principle Setting	Time setting	Setting system date, time and format and day-light saving time setting	
	Language Select	Setting system language	
	CH Setting	Setting CH title and position; adjusting image color parameter value; setting CH display to ON / Off and time display/recording time overlaying to On/Off.	
	Rec. Setting	Setting image quality, resolution, volume, recording mode and pack time	
	Rec. Search	Time based search, channel based search and rec. mode based search.	
	Rec. Playback	Specified time playback, scheduled playback, file list playback	
	Playback mode	Play, play frame by frame, multi-speed forward and multi-speed rewind	
	File backup	U flash disk and removable HDD backup, DVD recorder backup and network download backup	
	HDD Manage	Check HDD status, usage space, setting HDD auto-overwrite	
	VID/AUD Setting	Adjust VGA resolution, select system and volume control	
Advanced Setting	User password	Setting or modifying user password	
	Alarm setting	Setting HDD lost, HDD space, video loss, I/O status, alarm management and Email alarm	
	Motion detection	Setting on/off status of MD; select sensitivity and setting motion detection area.	
	PTZ control	Selecting CH and setting PTZ protocol, baud rate and PTZ address for the CH	
	MP Monitor	Setting user name, password and server port.	
	System Maintenance	Setting system auto maintenance, maintenance time regularly, system upgrade, ex-factory default value recovery and manual restart system	
Network Setting	Network and Port setting	Selecting network mode and setting net-viewer port, web port, DNS and DDNS parameters.	
Network Function	Live display	Real time video input remotely	
	Remote recording	Setting recording mode and status of DVR remotely	
	Remote playback	Check local recording history via network	
	PTZ control	Remotely control PTZ camera, position, focus, zoom and iris etc.	
	parameter set of DVR remotely	Setting local CH display, recording, alarm, PTZ control parameter value via network	
	Network download	Backup recording file via network	
Auxiliary function	System info	Check device model, software version and MAC address	
	()	In addition to illustrating picture, Parenthesis generally indicate optional parameter value of previous menu.	
Menu button	Confirm	The button allows you save the modification of parameter value.	
	Recover default	The button allows you recover default value of current menu or system	
	Exit	The button allows you exit the current menu.	
	Next	On multi-channel mode, the button allows you check or modify other channel's parameter; on [File list] mode, the button allows you display next page.	

8.2 Recording Alarm setting

Please refer the below matrix: “⊥” stand for “only alarm but no recording”; “AMR” stand for “alarm recording”; “NLR” stand for “normal recording”; and “NOR” stand for “no recording”. Once alarm is triggered, alarm icon will occur, and when many alarms are triggered, alarm remarks will occur on the screen.

Recording alarm setting		Alarm icon	Recording Mode				
			Recording after power on	Timing recording			Manuel Recording
				AMR	NLR	NOR	
Alarm mode	MD alarm		AMR	AMR	NLR	⊥	NLR
	I/O triggered alarm		AMR	AMR	NLR	⊥	NLR
	HDD loss, HDD space full		⊥	⊥	⊥	⊥	⊥
	Video Loss	Video Loss	⊥	⊥	⊥	⊥	⊥

List 8-2

When DVR is in recording mode,  icon or  icon will appear on the screen. But when there are  icon and  icons on the screen it indicates a motion alarm was triggered. When  icon appears on the screen, that mean a hard drive alarm has occurred.

8.3 Troubleshooting

1. Q: What can I do if the system does not detect the HDD?

A: Check the data and power cables and make sure they are securely connected.

2. Q: We have changed the password but do not remember the new password, how can we access the system?

A: If you forget system password, enter 0800808 into the password field to reset the password

3. Q: We are not getting any video signal on the DVR, what is wrong?

A: Check to make sure the cables are securely connected to the BNC ports on the DVR. You can also try another cable to make sure there is not a problem with the cable. Make sure you have selected the correct video format for your country (NTSC or PAL), in the USA we use NTSC.

4. Q: Can the DVR have problems if it gets too hot, how can I prevent this?

A: The DVR has a fan to help it dissipate heat while it is working. Please place the DVR in a place where there is good air circulation and away from high temperatures to increase stability and life of the DVR.

5. Q: My remote control does not work when the DVR is in Live mode but the front panel buttons are working, what is wrong?

A: Make sure nothing is blocking the LED on the remote, or the receiver on the DVR, if both are ok, check the batteries.

6. Q: Can I use the hard drive from my PC in the DVR?

A: You can if the hard drive is the same type and the size is supported by the DVR. If you install it in the DVR it will be formatted for use in the DVR and the PC will not be able to read it.

7. Q: Do I have to stop recording to playback files on the DVR?

A: No you do not have to stop recording, the DVR will support both functions at the same time.

8. Q: Can I erase files from the hard drive of the DVR?

A: You can not erase individual files, you would need to format the hard drive which will erase all of the files

9. Q: Why can't I log-in to the Net-viewer program?

A: Please verify that the Net mode is correct, The cable to the RJ-45 port is well connected to the DVR and the router, and that you are using the correct password.

10. Q: We have attached a PTZ camera but can not control it, what is wrong?

A: Verify that the Protocol, baud rate, address, and other settings on the PTZ camera match the settings you have put into the DVR. Make sure the data cables are attached firmly to the RS485 port on the DVR.


11. Q: Why does the Buzzer keep sounding?

A: Please check to see if motion detection is on and the system has detected motion, make sure the hard drive is

being detected and has sufficient space available, and that none of your cameras have lost video. You can turn off the buzzer in the Alarm setup option.


8.4 4 Channel System Connections

(Diagram is for reference only to show where to attach various devices to the DVR, the cameras, external alarms, USB flash drives, monitors and computers are not included with the standard DVR package)

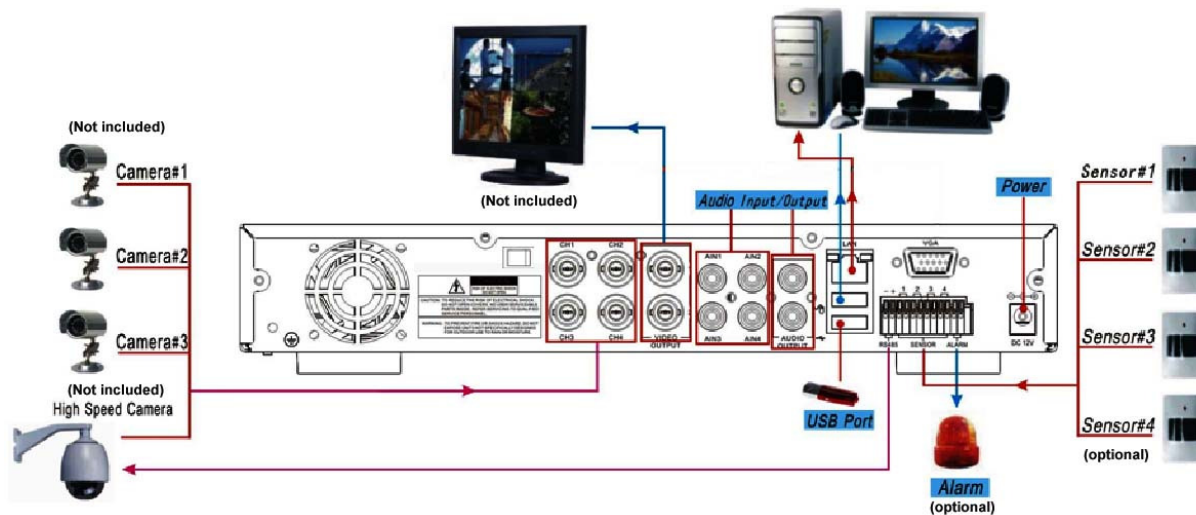

8.5 8 Channel System Connections

(Diagram is for reference only to show where to attach various devices to the DVR, the cameras, external alarms, USB flash drives, monitors and computers are not included with the standard DVR package)

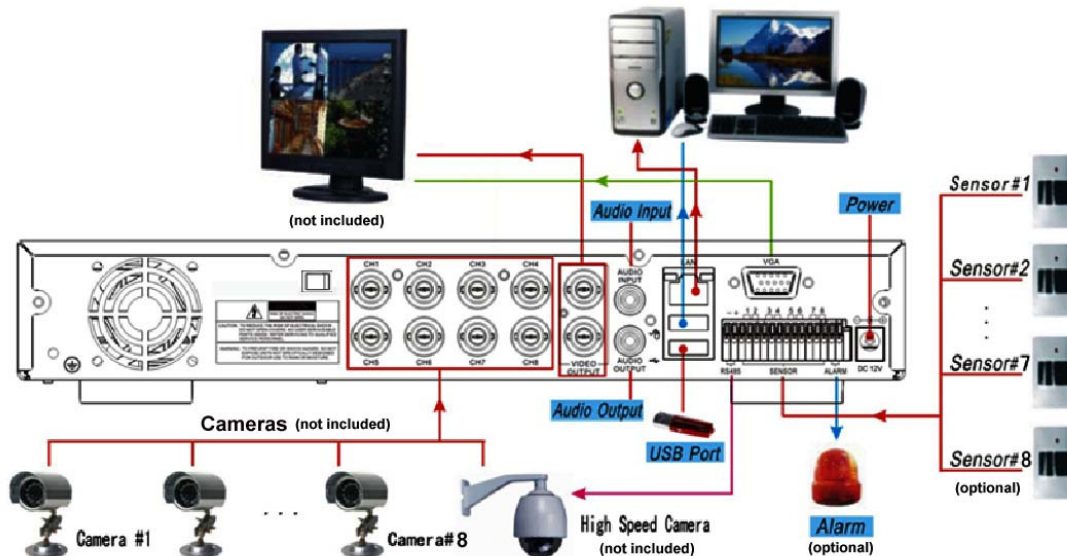

8.6 Accessories (Included)

Power Cord



Ethernet Cable



Power Adaptor



User Manual



Software CD



Remote Controller



USB Mouse



BNC to RCA Video Cable

Q-See Product Warranty

Thank you for choosing our products.

All of our products users have a conditional free warranty repair service for hardware within 12 months starting from purchase date, and a free exchange service within one month (valid for manufacturing defects). Permanent upgrading service is provided for the software.

Liability Exclusions:

Any product malfunction, abnormalities in operation or damage caused by following reasons are not within the free service scope of our company. Please select payable service.

- (1) Equipment damage caused by improper operation
- (2) Improper environment and conditions in/on which the equipment operates, e.g., improper power, environment temperature, humidity and lightening strike etc. that cause equipment damage.
- (3) Damage caused by acts of nature: earthquake and fire etc.
- (4) Equipment damage caused by the maintenance of personnel not authorized by our company.
- (5) Product sold over 12 months ago.

In order to provide various services to you, please complete registration procedure after you purchase the product. Cut off or copy User's Information Card and fax or mail it to us after the card is filled in. You can also register the product by going to the www.q-see.com website and clicking on the Register link.

If you have questions:

Contact

Us:

Mailing Address:

DPS Inc.

8015 E. Crystal Dr
Anaheim, CA 92807

Website:

<http://www.q-see.com>

Fax:

714-998-3509

Customer Service:

Phone: 877-998-3440 x 538

Email: cs@dpsi-usa.com

Tech Support:

Phone: 877-998-3440 x 539

Email: ts@dpsi-usa.com

Customer Information Card

User's Name	Mr./Mrs.
Company Name	
Postal Address	
Postal code	
Phone Number	
E-mail	
Model Number of Product	
Serial Number of Product	
Purchase Date	
Distributor	

The material in this document is the intellectual property of our company.

No part of this manual may be reproduced, copied, translated, transmitted, or published in any form or by any means without our company's prior written permission.

1. Our products are under continual improvement and we reserve the right to make changes without notice. But no guarantee is given as to the correctness of its contents.

2. We do not accept any responsibility for any harm caused by using our product.

3. The product picture may differ from the actual product, which is only for your reference. The accessories will probably be different according to the different selling areas. For details of accessories, please refer to your local distributor.

Copyright reserved